SPACE SAVING COST EFFECTIVE INNOVATE 300

INNOVATE 300

Public Access | Commercial | Exterior | Interior





OPEN PLATFORM LIFT

Innovate 300 is an Open Platform Lift, also known as Wheelchair Lift, which provides internal or external vertical travel up to 3 meters.

Our Open Platform Lift can accommodate changes in level from 600 mm up to 3000 mm in commercial and domestic environments and is appropriate alternative solution to a fully enclosed platform lift.

Innovate 300 is specifically designed for applications with little or no alterations to existing buildings. The open type design offers an aesthetically pleasing solution with brushed stainless steel finish as option. The lift provides a safe and easy way to gain access to a property where stairs would otherwise prevent wheelchair access.

It is designed to give customers choice and flexibility.


Innovate 300 Wheelchair Lift is a space saving and cost effective way to provide access for everyone to your home or workplace.

FEATURES

- Modern lightweight design
- A Stainless steel construction as option
- A Low space requirements
- A High level of security
- A Silent operation
- ∧ Simple to use
- A No pit required
- A Simple to install and easy to service
- A Overall low maintenance and running costs

TOP FLOOR GATE


Stainless steel finish for external use 850 x 1100 mm (Manual opening) (Left)

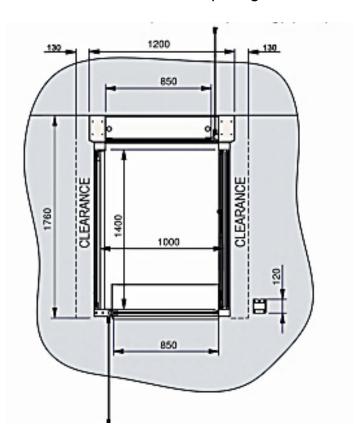

BOTTOM FLOOR GATE

850 x 1100 mm (Manual opening) (Left)

BELLOWS UNDER THE PLATFORM

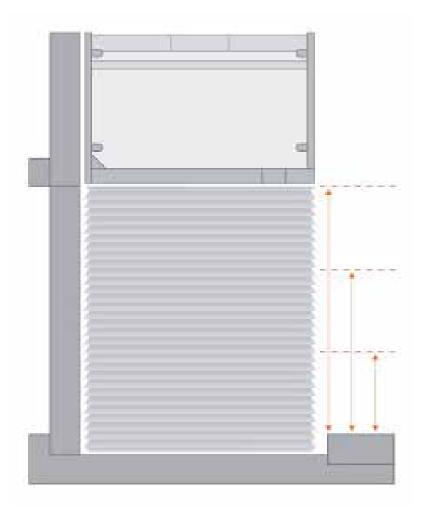

3 LIFTING HEIGHTS

From 2010 to 3000 mm, Pit = 350 mm, 1500 euros.

From 1010 to 2000 mm, Pit = 260 mm, 1200 euros.

From 600 to 1000 mm, Pit = 170 mm, 1100 euros

FIXATIONS

On ground floor, at the four corners of the below, and at the platform, fixations will be provide.



OTHER OPTIONS

PLATFORM

900 x 1400mm

1000 x 1400mm

GATE

Automatic upper gate

Automatic lower gate

CONTROL

Configurate control side

Dual control on the platform

Auto dialer on the platform

Remote control

Braile on the control

SAFETY

Battery emergency lowering device

FINISH

Painted in any RAL colour

Brushed Stainless Steel

PLATFORM SIZE POSSIBLE:

1100 x 1400 mm (shaft 1300 x 1760 mm). Gate opening = 950 mm

















SPECIFICATIONS

USER GROUP Ambulant and wheelchair users

SUITABILITY For internal or external use

TRAVEL From 600 mm up to 3000 mm

NUMBER OF STOPS 2

MAXIMUM CAPACITY 400 kg

PLATFORM SIZE 1100 x 1400 mm (standard)

1300 x 1770 mm (standard)

EXTERNAL DIMENSIONS 950 x 1100 mm (standard) with auto closers

GATE 1100 mm

CABIN HEIGHT Belt

DRIVE TYPE 220-240 V, 1 phase, 16A

POWER 380-400 V, 3 phase, 10A, 50 Hz

LIGHTING Controls illuminated

SAFETY EDGE Safety edge-under platform proximity sensors

HANDRAIL Integrated to lift cabin (on both sides)

MACHINE ROOM Integral to guide rails

FLOOR Anti slip rubber (Anti slip diamond plate for outdoor version)

FINISH RAL 9006 (Anodized aluminum)



HAMPSHIRE

Unit B, 34 Parham Drive Woodside Trade Centre Eastleigh SO50 4NU

KENT

50A St Johns Road Tunbridge Wells Kent TN4 9NY **T:** 01892 557530 **T:** 02382 516739

E: info@innovatelifts.com **W:** www.innovatelifts.com

